



## IMAGENEX MODEL 831A DIGITAL PIPE PROFILING SONAR

### APPLICATIONS:

- Profiling
- Pipeline Inspection
- Scientific Research


### FEATURES:

- Programmable
- High performance
- Scans 360° in 1 sec (up to 1 m range)
- Low power
- Digital telemetry
- 0.25 m to 6 m operation (full scale)
- Compact size
- Communication format available to user



HARDWARE SPECIFICATIONS:	
FREQUENCY	2.25 MHz
TRANSDUCER	Profiling type, fluid compensated
TRANSDUCER BEAM WIDTH	1.4° conical
RANGE RESOLUTION	1/250 of full scale range (e.g. 1 mm at 250 mm)
MIN. DETECTABLE RANGE	50 mm (~ 2")
MAX. OPERATING DEPTH	1000 m
MAX. CABLE LENGTH	1000 m on typical twisted shielded pair (RS-485)
INTERFACE	RS-485 serial interface @ 115.2 kbps (or optional RS-232)
CONNECTOR	End mounted, four conductor, wet mateable (Impulse MCBH-4-MP-SS)
POWER SUPPLY	20 – 36 VDC at less than 5 Watts
DIMENSIONS	79.4 mm (3.125") diameter x 273 mm (10.73") overall length
WEIGHT: In Air	1.4 kg (3 lbs)
In Water	0.5 kg (1 lb)
MATERIALS	6061-T6 Aluminum & Polyurethane
FINISH	Hard Anodize

<b>SOFTWARE SPECIFICATIONS:</b>	<b>PipeSonar.exe</b>
<b>WINDOWS™ OPERATING SYSTEM</b>	Windows™ 95, 98, Me, NT, 2000, XP, Vista
<b>MODES</b>	Polar
<b>RANGE SCALES</b>	0.25 m, 0.50 m, 0.75 m, 1 m, 2 m, 3 m, 4 m, 5 m, 6 m
<b>STEP SIZE</b>	0.9°
<b>GRID TYPES</b>	Polar
<b>FILE FORMAT</b>	(filename).31A
<b>RECOMMENDED MINIMUM COMPUTER REQUIREMENTS:</b>	100 MHz Pentium 16 MB RAM 1 GB Hard Disk 800 x 600 x 256 colour graphics

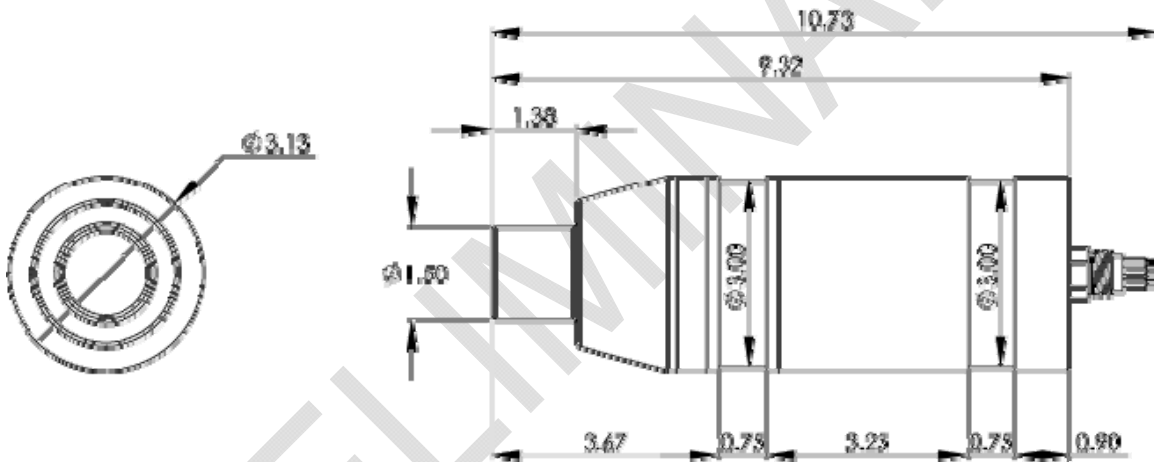

<b>ORDERING INFORMATION:</b>		
<b>1000 m UNIT</b>	Standard	831A-000-200
RS-232	Option	-006
Interface source code in "C" (TEST831A.C)	Option	-018

Product and company names listed are trademarks or trade names of their respective companies.